


NOTES:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 6Ω(Max)
- 3:HDTV: 4K*2K@60HZ 4:4:4 (HDMI2.0 Compliance).
- 4:Cable Marking:4Kx2K(2160P) Ultra-High Definition
3D Cable High Speed HDMI™ Cable with
Ethernet E***** AWM 20276 80°C 30V
VW-1 COPARTNER

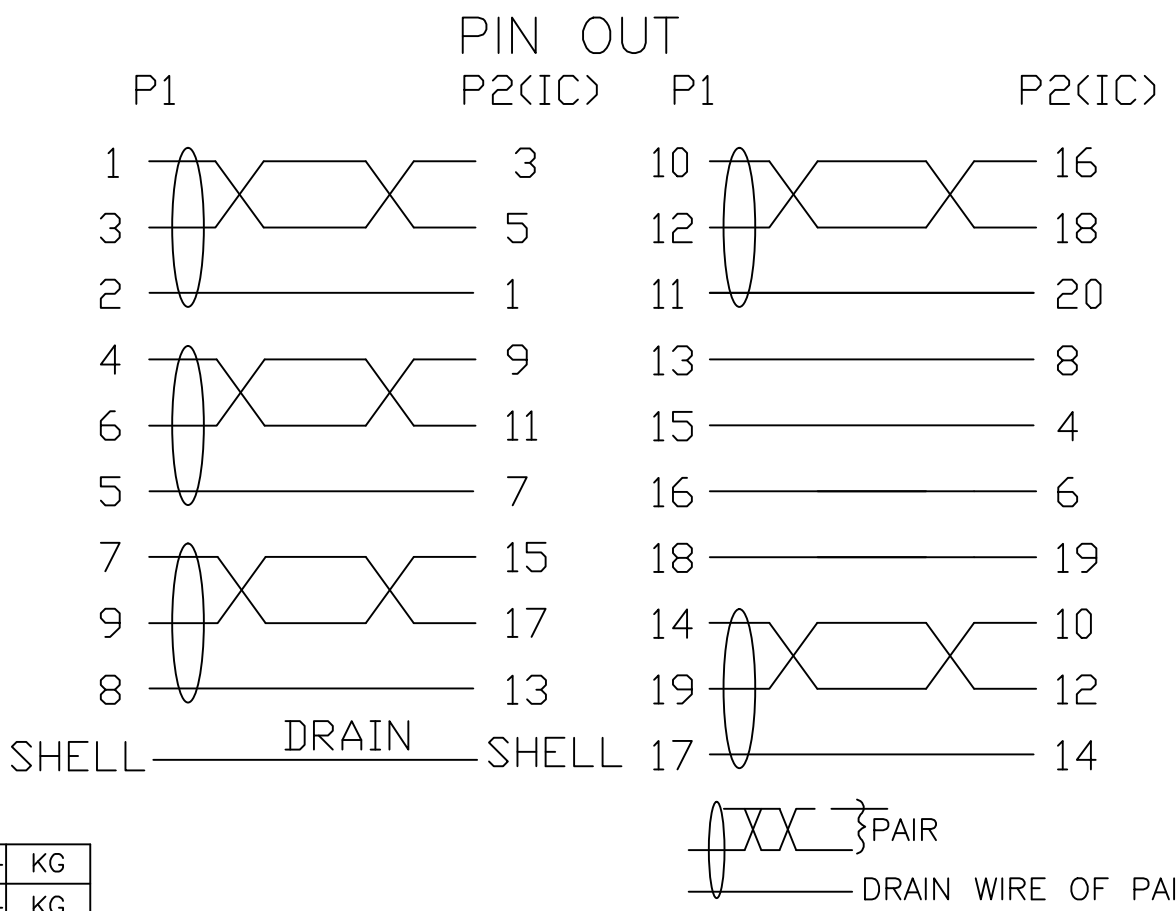

⑥	OUTER MOLDED	BLACK 45P PVC	0.024	KG
⑤	INNER MOLDED	LDPE	0.024	KG
④	DUST CAP	LDPE DUST CAP FOR HDMI AM	2	PCS
③	CONNECTOR	HDMI A TYPE MALE WITH IC:PRE1700, SHELL AND PIN GOLD PLATED	1	PCS
②	CONNECTOR	HDMI A TYPE MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	1	PCS
①	CABLE	(1P*26AWG+D+AL+MYLAR)*5C+4C*26AWG+ADB(128/0.12ALM),JACKET:BLACK PVC,OD:8.5±0.2MM	10000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by Lisa	Checked by HELEN	Approved by - date May 10.2018	File name HDMI2.0 AM TO AM	Date May 10.2018	Scale FREE
ANGLE:		HDMI 2.0,AM TO AM,GOLD PLACTED, 26AWG (with PRE 1700)			
UNIT:MM		32 3678	Edition 1	Sheet 1/1	