
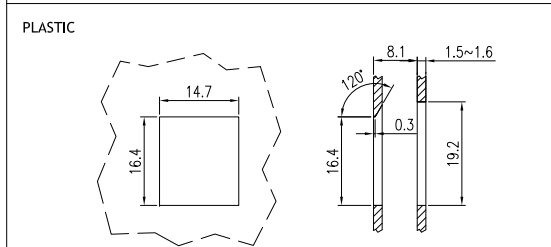


SUGGESTED CUTOUT: FLUSH-MOUNT APPLICATION

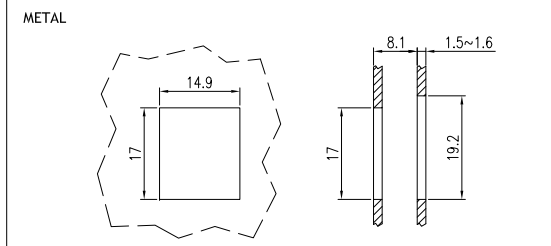

P / N	COLOR
HCIFP-15	WHITE
HCIFP-15BK	BLACK

MATERIAL
 Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated
 PCB: FR4, t=1.6 mm (0.063 in)

USB Connector:
 Shell: Copper Alloy, plated with Nickel
 Plastic: High-impact Polybutylene terephthalate (PBT resin), UL 94 V-0 rated, Glass Filled
 Contact: Copper Alloy, plated with think hard gold 0.76 μm (30 μin)
 RoHS compliant

DRAWN BY Ethan Wu				
APPROVED BY Jerry Su				
DIMENSIONS ARE MM [IN]				
TOLERANCES:				
~20	~50	~150	150~	ANGLE
±0.2	±0.4	±0.5	±1.5	2°
3rd Angle Projection				

CC		
TITLE ADAPTERS & COUPLERS		
DWG. NO. HCIFP-15 & HCIFP-15BK	REV. 1	
CUSTOMER PARTS NO.		
DATE 2012.02.01	SCALE X	SHEET 1/1